


LogStick®



Temperature and humidity Logger LS350-TH operate by the button battery drive. Moreover, the temperature and humidity can continuously be recorded without the battery exchange for a long time by the power saving design. Moreover, the measurement record can be done by setting it up anywhere readily by the battery drive and the miniaturization of the body. In addition, the measurement in the place became possible by having installed the LCD, too.



Feature

- The temperature and humidity are the temperatures and the humidity loggers that can record each 1ch as the measurement.
- It is USB stick type of a possible direct insertion in USB of the computer.
- The button battery is adopted, and the small size and lightness have been achieved.
- It is displayed that a set value is exceeded by setting the threshold with LED.
- It can know temperature/humidity even if there is no computer by installing of LCD.
- ON/OFF of the record can be set without using the personal computer.

Usage

- To temperature/humidity management in the inventory location.

Musical instruments
(violin and flute, etc.)



Medicine storehouse



In server



Restaurant



Warehouse




Hospital



Green house

Control software screen image

● Graph sample

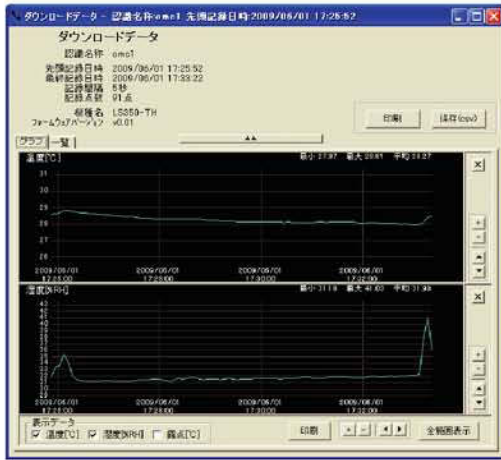

● List sample

番号	日時	温度(℃)	湿度(%RH)	電池(%)
1	2009/06/01 17:26:52	28.59	31.54	1029
2	2009/06/01 17:26:57	28.05	30.52	1105
3	2009/06/01 17:26:52	28.70	32.08	1114
4	2009/06/01 17:26:07	28.80	36.98	1200
5	2009/06/01 17:26:12	28.91	34.09	1142
6	2009/06/01 17:26:17	28.77	32.03	1048
7	2009/06/01 17:26:22	28.74	31.45	1015
8	2009/06/01 17:26:27	28.70	31.34	1036
9	2009/06/01 17:26:32	28.68	31.28	999
10	2009/06/01 17:26:37	28.65	31.20	998
11	2009/06/01 17:26:42	28.62	31.13	992
12	2009/06/01 17:26:47	28.59	31.10	989
13	2009/06/01 17:26:52	28.59	31.25	950
14	2009/06/01 17:26:57	28.55	31.29	982
15	2009/06/01 17:27:02	28.53	31.26	987
16	2009/06/01 17:27:07	28.52	31.20	985
17	2009/06/01 17:27:12	28.51	31.18	982
18	2009/06/01 17:27:17	28.49	31.25	922
19	2009/06/01 17:27:22	28.48	31.25	953
20	2009/06/01 17:27:27	28.44	31.26	879
21	2009/06/01 17:27:32	28.43	31.22	980
22	2009/06/01 17:27:37	28.39	31.39	981
23	2009/06/01 17:27:42	28.38	31.48	991
24	2009/06/01 17:27:47	28.35	31.45	991
25	2009/06/01 17:27:52	28.34	31.53	983
26	2009/06/01 17:27:57	28.34	31.53	983
27	2009/06/01 17:28:02	28.32	31.45	978
28	2009/06/01 17:28:07	28.32	31.31	972
29	2009/06/01 17:28:12	28.29	31.22	970

Spec

Product specification

Temperature	Channels	1ch
	Range	-20 ~ 70℃
	Resolution	0.01℃ (14bit)
	Accuracy	±0.8℃ (At 25℃)
Humidity	Channels	1ch
	Range	5 ~ 90%RH
	Resolution	0.03%RH (12bit)
	Accuracy	±4%RH (20~80%RH)
Storage capacity	15000 point (Max)	
Interval	2Sec~240Min	
PC interface	USB	
Clock function	Building into	
Use battery	CR-1220 (It is possible to exchange it.)	
Battery life	One year (Measurement interval = one hour)	
LCD part	Reflection type TN	

Compatible specification

CE agreement

EMS[EN55024]EN61000-4-2/-3/-8

EMI[EN55022ClassB]

Size

100.7(W) × 10.4(H) × 21.0(D) (mm)

Weight

About 20g (It doesn't contain the battery.)

OS (※The control software is from Web to free download.)

Windows 2000、Windows XP (SP2 over)、Windows Vista

Accessory



Main body



Case



Guide book
written guarantee



Exterior box

※ The specification, externals, and the painting color etc. of the description might change without a previous notice for the improvement.

※ The color of the commodity in the catalog might be different from the actuality on the characteristic of the print.

※ LogStick* s a registered trademark of the Osaka Micro Computer.