

### 【1】 Product Appearance




#### Applications

Can use as floodlight, street lamp at high-speed roads, road, street

#### Features


- By the design of optical reflector, uniform illumination is obtained
- Aluminum heat sink design adopted by unique heat dissipation
- A unique heat-resistant circuit is adopted
- No UV or infrared radiation
- Long life span of up to 50,000 hours

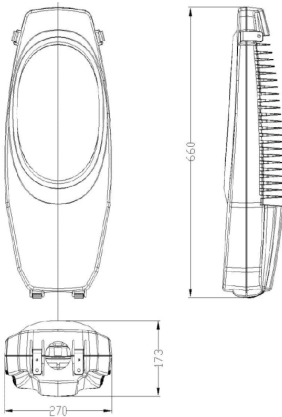

### 【2】 Specification

Model	LUX-SL80	LUX-SL120
Size	660(L) × 173(W) × 270(H)mm	660(L) × 173(W) × 270(H)mm
Weight	11.8kg	13 kg
Input Voltage	AC85-265V / 277V / DC10-28V	
LED Luminous Flux	>7,200 lm	>10,800 lm
Power Consumption	80W ± 10%	120W ± 10%
Beam Angle	140° x 75°	140° x 75°
Color Rendering Index	Ra>75	
Color Temperature	5000-5500K	
Working Temperature	-40 °C ~ 50 °C , -10 ~ 90%RH	
IP Grade	IP65	
Certification	CE, UL, RoHS	
Life-span	>50000H	
Warranty	3 年	

### 【3】 Lighting Distribution Curve

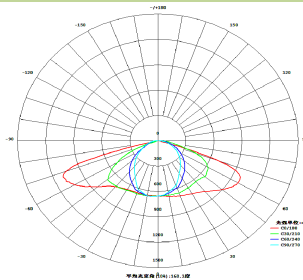

Okumura & Systems Co.,Ltd.